

**RView pro**  
Mobile client User Manual

**V1.0.1**

# table of Contents

<b>1.</b>	<b>Product Introduction</b> .....	2
1.1	Product Overview.....	2
1.2	Main features .....	2
<b>2.</b>	<b>Software Installation</b> .....	2
2.1	operating environment requirements .....	2
2.2	acquisition software.....	3
<b>3.</b>	<b>Software Operating Instructions</b> .....	3
3.1	Introduction to login screen.....	3
3.2	Live Preview.....	5
3.3	Remote playback.....	6
3.4	Equipment management .....	7
3.5	Message Center .....	9
3.6	Image Browser .....	10
3.7	Alarm Notification.....	11
3.8	About help.....	12
3.9	logout .....	12
3.10	Account Management.....	12
3.11	Language switching.....	13

# 1. Product Introduction

## 1.1 Product Overview

RView pro is a professional mobile video surveillance software, with the specified DVR, network camera.

## 1.2 Main features

The main function:

- Sign up, change password, forget password
- Real-time preview (intercom, monitor, PTZ control)
- Device management (add, delete, modify settings)
- Remote playback
- Arming the alarm
- Image browsing
- About help
- Account Management
- Digital password lock
- logout

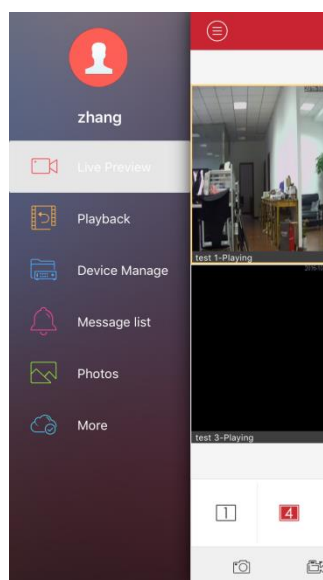


Figure 1.1a

# 2. Software Installation

## 2.1 operating environment requirements

Apple's mobile client requirements ios6.0 above system; Andrews mobile client requires android 2.2 and above system


## 2.2 acquisition software

Apple mobile phone users: Search RView pro installed in the Apple App Market (appstore) on.


Android mobile phone users: Google Market (google play), search for treasure RView pro installed application, Android Market and other major applications.

## 3. Software Operating Instructions

### 3.1 Introduction to login screen

After successful installation, click on the phone  Software icon, the software can run. Start the program to enter the login interface, as shown below

Functions	Introduction
Login	Account login, device information can store in the cloud storage
Remember me	After the check, remember the current user password
automatic logon	Check after the start of the software automatically login account
Local login	Without account directly into the device saved in the phone

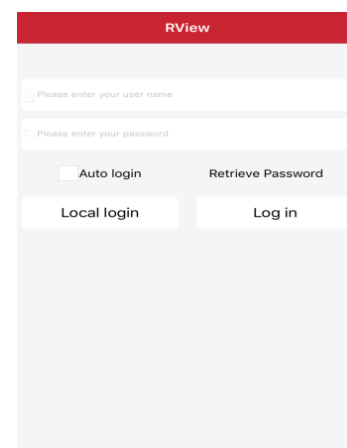

Register

- User registration

Register an account, the account for cloud storage of our user information and related equipment list, in the login menu, click the "user registration" button, jump to the registration interface:

Functions	Introduction
Username	user login (only letters and numbers, "-", "_", "@" character)
Password	login password (6 digits or more)
Confirm password	enter the password again
Email	email security, please fill in the correct, to forget the password you can reset the password
Cell phone number	optional

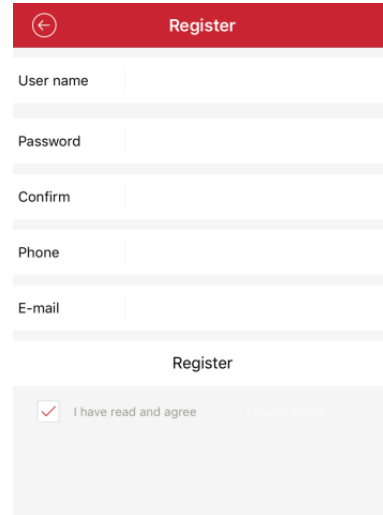


Figure 3.1b

- Find the password

In the login interface, click the "retrieve password" button, jump to "retrieve password" interface:

1. Enter the user name to retrieve the password
2. Click "retrieve password", the system will send a reset password link to our registration set when the mailbox, enter the mailbox according to the prompt set password

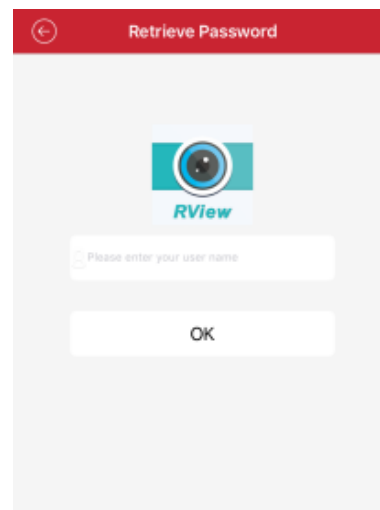


Figure 3.1c

### 3.2 Live Preview

Click the device icon in the device list to enter the playback interface, as shown below:

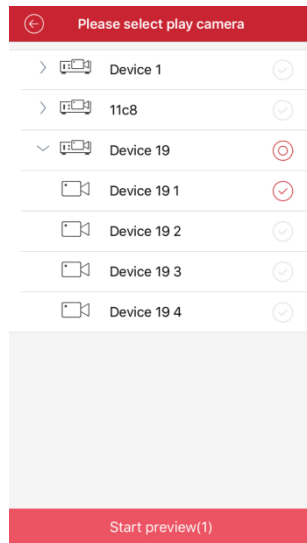


Figure 3.2a

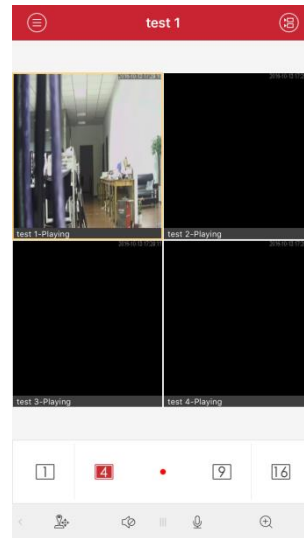






Figure 3.2b

Double-click the window to enlarge the screen when playing, horizontal screen can be full-screen playback.

Video monitoring interface buttons function description, as shown in the following table:

Button icon	Function introduction	Button icon	Function introduction
	View main menu		Capture
	Play / stop		Local video
	Open / close monitor		Start the intercom

	Playback channel amplifier		Bit Stream Switching
	PTZ camera control		Multi picture switching

### 3.3 Remote playback

The mobile client can access the remote device, retrieve the video data stored on the hardware, and need to have the storage device in order to realize the remote playback function.

In real-time preview interface selected to be played back window, click on the remote playback menu to enter playback interface, default video player that day.

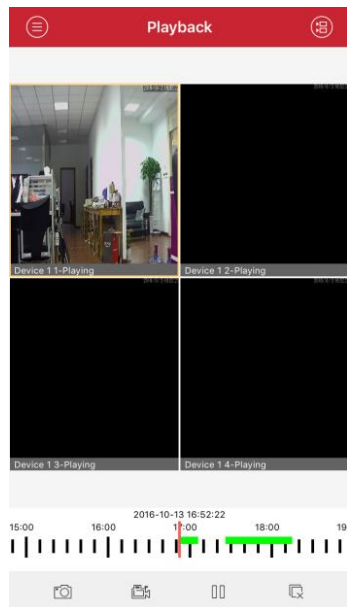


Figure 3.3a

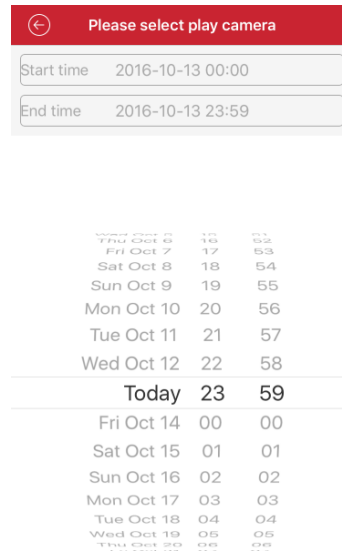






Figure 3.3b

1, click on the channel can choose other dates, select the date you want to play can be.

2, below the green area for a video time, can be dragged to the progress bar to play the time to play

### 3.4 Equipment management

After entering the main menu interface, select "Device Management" to enter the management interface

Icon	function declaration
	Return to the main menu list
	Add equipment
	Click to modify connection parameters
	Device, click to play all channels

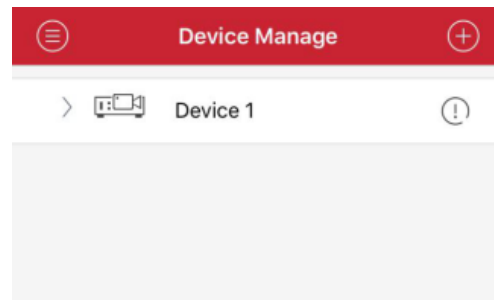



Figure 3.4a

- Add a device

Click the top right corner  Add button to enter the device to add the interface, enter the device can be manually added to the connection parameters, you can click the search button in the LAN search device to add.

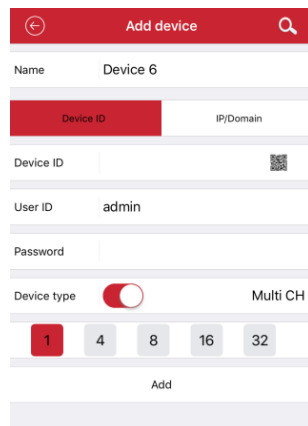


Figure 3.4b

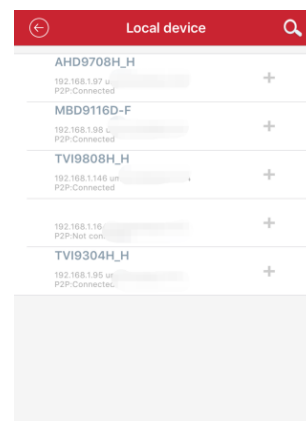



Figure 3.4c



- Connection mode: serial number and IP / domain direct connection of two ways. Cloud way is to use the device serial number to connect; ip way is to use the traditional ip address or dynamic domain name and port to connect the device. By default add the serial number, the point above IP / domain switch to ip mode.
- Name: is the name of the monitoring device, it can help you identify the location of the device, we recommend that you place the device by which a name, the name will be displayed under the device icon will appear on the title while playing
- Serial number: Cloud Connector unique serial number, the device can be carried in the label or Intranet search, you can click the input box to the right of the two-dimensional code input button  Dimensional code scanning input
- Username: front-end equipment the user name, the default is admin;
- Password: password Username front-end equipment, and front-end equipment to match, default is empty After filling out the settings, click OK, point after the pre-connection check device will automatically fill in information is properly and

correctly will automatically return to "Device List" screen, click on the device, you can view the video; not correct, click device,

Tip: Equipment offline.

- Modify, delete the device
- Connection parameters: You can change the name, serial number to connect to the user name, password, connection parameters.
- Delete Device: Click Edit, you can see a "delete this device", click "remove this device" button and click "OK" to delete.

### 3.5 Message Center

When the device generates an alarm, the device sends an alarm message to the server. The message is then sent to the mobile client through the server. The mobile terminal displays the notification in the message center.

Click the top right corner  Delete button, you can delete all alarm records.

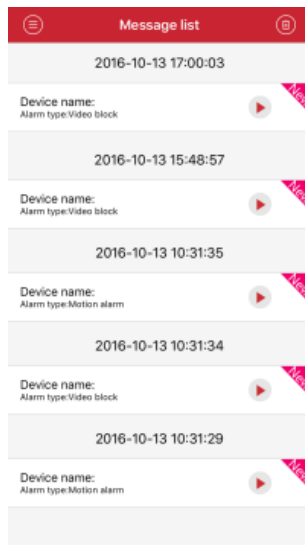


Figure 3.5a

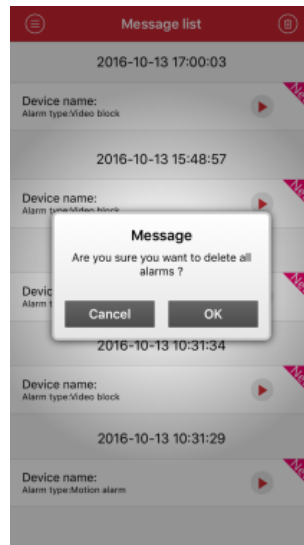




Figure 3.5b

### 3.6 Image Browser

Live preview when clicked  or  After that, the generated image is stored directly in the phone, from the menu into the local video or local album can view

- Playback images:
  - Click on the video compression column chart, you can select the player to play.
  - Click on the captured image to open it.






Figure 3.6a

- edit delete:

- Top right, click "Select" button, select the edit list into a state, select the files you want to delete click the bottom right corner  Button can be.

- Top right, click "Select" button, select the edit list into a state, select the phone needs to be saved to a local file clicking on the left  Button can be.

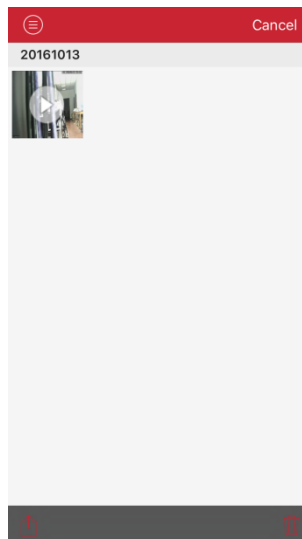



Figure 3.6b

### 3.7 Alarm Notification

Turn alarm: device management interface to select the channel point alarm modification  Enter the setting interface, turn on the channel name confirmed alarm, alarm notification and arming switch open, save, indicating success can be.

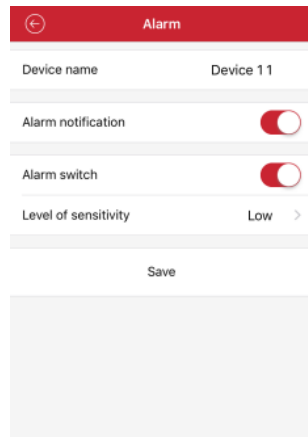


Figure 3.7a

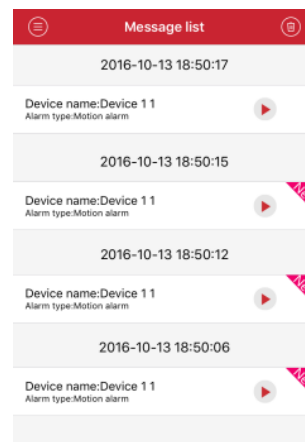


Figure 3.7b

- **Push notifications:** the success of the arm and turn the lens notified when the device generates an alarm, the device sends an alarm message to the server, and then send the message to the mobile client through the server, mobile terminal to notify the prompt. As shown in Figure 3.7b

### 3.8 About help

You can query the software version information

### 3.9 Logout

Click "Logout" to exit the current account login, and return to the login screen.

### 3.10 Account Management

Click the user picture, you can choose to automatically login, modify the password function

### **3.11 Language switching**

When the phone operating system to change the language, the language of the software with the replacement. For example: mobile phone operating system language is replaced with English, then the phone software language will be replaced with the English.